

**LOW LEAD COMPLIANT 2 PC 600 WOG
 GAS APPROVED BALL VALVE**

Features:

- 600 WOG
- Full Port
- NSF 61 Annex G Certified (Truesdail) (Annex G references NSF 372)
- CSA Approved
- Meets MSS SP-110 Standards
- Blow-out Proof Stem
- Adjustable Packing
- Threaded NPT Ends Per ANSI B 1.20.1
- Optional Lock Lever Kit
- Optional Stem Extension Kit
- Optional Tee Handle Kit
- Optional Oval Handle Kit
- Optional Memory Stop Kit

NOT RECOMMENDED FOR BURIED SERVICE

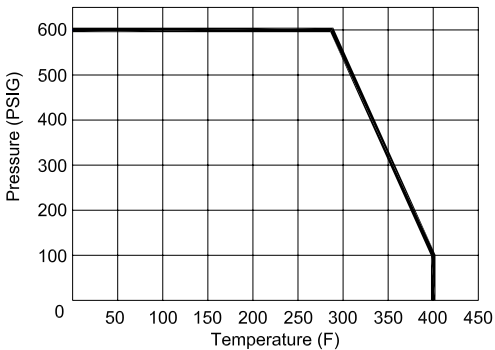


Figure Number Matrix

FNW X410C Size		
SIZE CODE		
1/2" = D	1-1/4" = H	2-1/2" = L
3/4" = F	1-1/2" = J	3" = M
1" = G	2" = K	4" = P

Low Lead Compliant: Referring to laws defining "Lead Free" as wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤ 0.25% per the Safe Drinking Water Act (Sec. 1417) amended 1-4-2011 as well as other state regulations.



Kit Codes (Order Separately)



FNW 410A Kit Size	
KIT TYPE	SIZE CODE
Replacement Handle = BRYLWH	1/2" = BD
Locking Lever = LHK	3/4" - 1" = FG
Stem Extension = SE	1-1/4" - 1-1/2" = HJ
Tee Handle* = THK	* 2" = KP
Oval Handle* = OHK	
Memory Stop = MSK	

* NOTE: Due to the higher torque requirements of larger valves, use of Tee and Oval handles on valves larger than 1-1/2" can be difficult to operate.




Gas Approvals


- CSA Class 3371-08, ANSI Z21.15/CSA9.1, 1/2 PSIG, -40°F - 125°F
- CSA Class 3371-10, CGA 3.16, 125 PSIG, -40°F - 149°F
- CSA Class 3371-12, CGA CR91-002, 2-5 PSIG, -40°F - 125°F
- CSA Class 3371-88, ANSI Z21.15/CSA9.1, 1/2 PSIG, -40°F - 125°F
- CSA Class 3371-92, ASME B16.44, 5 PSIG, -40°F - 125°F
- CSA Class 3371-94, ASME B16.33, 125 PSIG, -20°F - 150°F

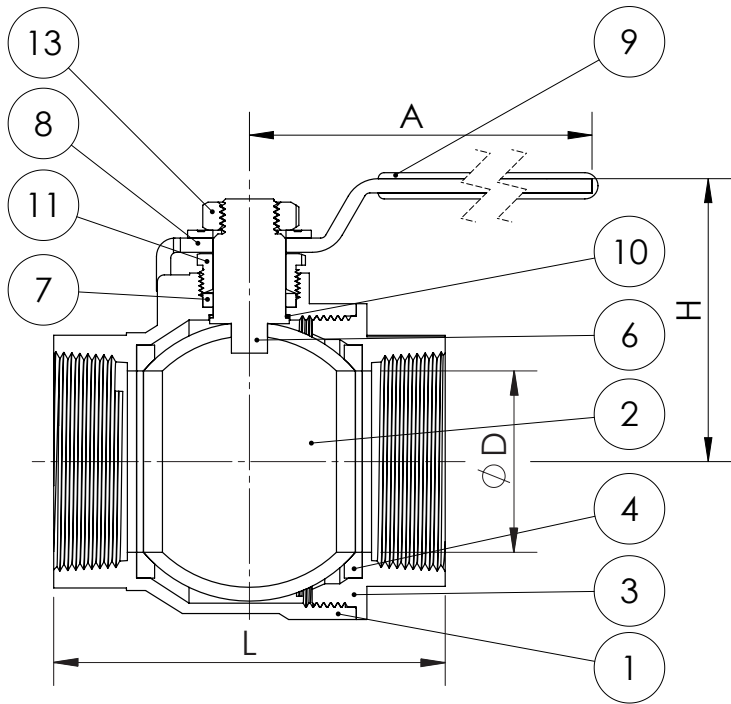


STEM EXTENSION KIT



TEE HANDLE KIT



LOCKING LEVER KIT



OVAL HANDLE KIT

SIZE	ØD	A	L	H	Wt. (Lbs)
1/2	0.50	3.15	2.13	1.50	0.40
3/4	0.75	4.33	2.48	1.85	0.74
1	0.98	4.33	2.99	2.05	1.03
1-1/4	1.26	5.12	3.35	2.36	1.61
1-1/2	1.50	5.12	3.62	2.56	2.11
2	1.97	7.87	4.25	3.11	3.83

SIZE	AL	HL	AO	HO	AT	HT	AE	HE
1/2	3.27	1.74	2.76	1.52	2.60	1.42	2.95	4.35
3/4	4.33	2.13	3.54	1.87	3.31	1.77	3.94	4.84
1	4.33	2.33	3.54	2.07	3.31	1.97	3.94	5.04
1-1/4	5.24	2.67	4.33	2.38	3.94	2.28	4.92	5.31
1-1/2	5.24	2.87	4.33	2.58	3.94	2.48	4.92	5.31
2	7.99	3.58	5.35	3.23	4.72	3.11	7.87	6.06

Ref. No.	Description	Material	Qty	Remarks
1	Body	C46400 Lead Free Brass	1	1/2"-1-1/2"
		Modified C46400 LF Brass		2"
2	Ball	C46400 Lead Free Brass (Chrome Plated)	1	1/2"-3/4" Solid 1"-2" Shell
3	End Cap	C46400 Lead Free Brass	1	
4	Seat	PTFE	2	
6	Stem	ASTM B16-C36000	1	
7	Stem Packing	PTFE	1	
8	Handle	ASTM A283-D Steel	1	Zinc Plated
9	Handle Sleeve	Vinyl	1	
10	Thrust Washer	PTFE	1	2" only
11	Packing Gland	ASTM B16-C36000	1	
13	Handle Nut	AISI-1010 Steel	1	Zinc Plated